
HUAHAI LED



Specs

Item	1.5	1.86	1.9	2.5	2.6	2.97	3.9	6.25
Pixel Pitch (mm)	1.56	1.86	1.95	2.5	2.604	2.97	3.91	6.25
LED Configuration	SMD1010	SMD1212	SMD1212	SMD1515	SMD1515	SMD1415	SMD1921	SMD2727
Pixel Density (pixels/m²)	409,600	287,296	262,144	160,000	147,456	112,896	65,536	25,600
Brightness (cd/m²)	700–1000	700–1000	700–1000	700–1000	700–1000	1000–2800	1000–2800	1000–2800
Module Size (W x H mm)	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250
Module Resolution (pixels)	160x160	134x134	128x128	100x100	96x96	84x84	64x64	40x40
Panel Size (W x H mm)	500x500	500x500	500x500	500x500	500x500	500x500	500x500	500x500
Panel Resolution (pixels)	320x320	268x268	256x256	200x200	192x192	168x168	128x128	80x80
Panel Weight (kg/pc)	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
Cabinet Material	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum
View Angle (H./V.)	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°
Power Consumption (w/m²)	800/270	800/270	800/270	800/270	800/270	800/270	800/270	800/270
Refresh Rate	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
Gray Scale	≥14 bits	≥14 bits	≥14 bits	≥14 bits	≥14 bits	≥14 bits	≥14 bits	≥14 bits
Ingress Progress	IP54/IP55	IP54/IP55	IP54/IP55	IP54/IP55	IP54/IP55	IP55/IP66	IP55/IP66	IP55/IP66
Mask Materials	COD					PC / Tempered glass		

Dimensions

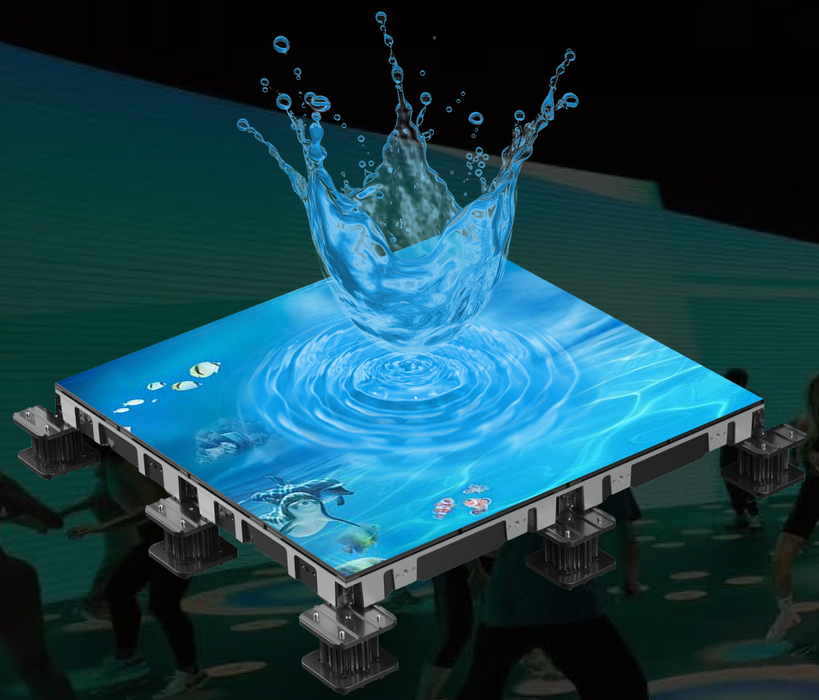

High Sensitivity & Intelligent Interactive Experience

Independently developed interactive system, with built-in laser sensor and MCU control chip, it brings super high sensitivity and shorter response time.
This system comes with a number of interactive games.



Super strong load-bearing capacity

Die-casting aluminum chassis and frame supported structure design, its loading capacity reaches 2000–2500kg /m².



KG

2000–2500kg /m²

floorPad


Interactive Floor Screen

HUAHAI LED
7231 NW 54th street, Miami, Fl 33166
(305) 436-8650
www.huahai.us

Fast Installation

Customized metal feet and height adjustable, it can be widely applied to uneven grounds and installed quickly.





Height Adjustable

High Protection

IP65 waterproof level, module corner protection and module scratch–resistant make it more reliable in outdoor environment.



360° Viewing Angle

360° viewing angle brings excellent viewing epxerience for audiences from any angle.



Easy Maintenance

Magnet module, fast and easy front maintenance.




COD Technology

Module adopts COD technology and module surface is black matte type, and it brings better color consistency performance, high intensity and better resistance to high and low temperatures.

Mask Materials





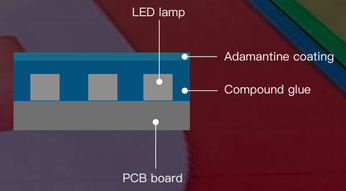

Multiple Installations

It is versatile to be applied to floor screen, stacking and ceiling mounted installtion, which meets the rvarious application requirements.

