HUAHAI LED






Specs

ITEM	P3.9–7.8	P5.2–10	P10.4	P15.6
LED	SMD1921	SMD1921	SMD2727	SMD2727
Pixel Pitch	X:3.9 Y:7.8	X:5.2 Y10.4	X:10.4 Y10.4	X:15.6 Y:15.6
Module Resolution	128x32	96x24	48x24	32x16
Module Size (W x H mm)	500x250	500x250	500x250	500x250
Pixel Density (pixels/m²)	32,768	18,432	9,216	4,096
Cabinet Resolution (WxH)	256x64	192x48	96x48	64x32
Cabinet Size (WxH mm)	1000x500x80	1000x500x80	1000x500x80	1000x500x80
Cabinet Weight (kg/pc)	7.5	7.5	7.5	7
Cabinet Material	diecast aluminum			
Transparent Rate	53%	58%	58%	71%
Ingress Protection	IP65	IP65	IP65	IP65
Maintenance	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Refresh Rate (Hz)	3840	3840	3840	3840
Brightness (nits)	≥4500	≥4500	≥4500	≥5500
Power Consumption (W/m²)	800/260	800/260	800/260	800/260

Dimensions

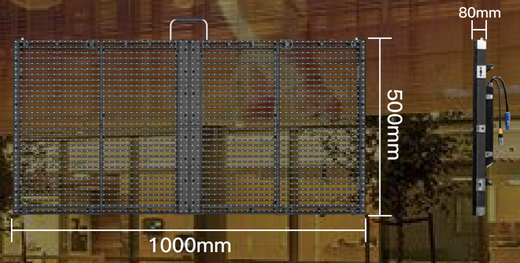

Highly Transparent: 53%~71%



Lightweight: 7.5kg each



invisiLED

Transparent Panel

HUAHAI LED


7231 NW 54th street, Miami, Fl 33166

(305) 436-8650

www.huahai.us


High Strength

The panel has been tested to a breaking point of 2.1 tons. Taking a safety factor of 6, 23m of invisiILED can be safely hung.



Quick and Easy Access to all Parts

The modules front and rear access.

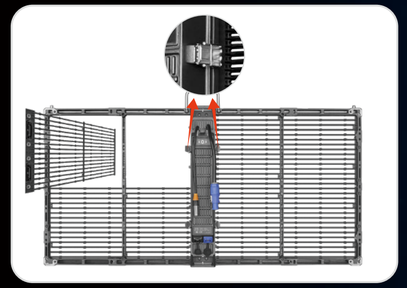

IP65 Waterproof



Application

Permanent Installation









Application

Instant Installation







