HUAHAI LED






Specs

ITEM	SPA-6	SPA-8	SPA-10
LED	SMD2727	SMD2727	SMD3535
Pixel Pitch (mm)	6.67	8	10
Module Resolution	48x48	40x40	32x32
Module Size (WxH mm)	320x320	320x320	320x320
Module Quantity (WxH)	5x3	5x3	5x3
Cabinet Resolution	240x144	200x120	160x96
Cabinet Size (WxH mm)	1600x960	1600x960	1600x960
Cabinet	Sheet Aluminum	Sheet Aluminum	Sheet Aluminum
Weight (kg/㎡)	37	37	37
Ingress Protection	IP65/IP54	IP65/IP54	IP65/IP54
Refresh Rate (Hz)	7,680-15,360	7,680-15,360	7,680-15,360
Brightness (nit)	6,000-10,000	6,000-10,000	6,000-10,000
View Angle (H./V.)	120°/ 106°	120°/ 106°	120°/ 106°
Contrast Ratio	8,000:1	9,000:1	10,000:1
Power Consumption (W/㎡)	600/200	600/200	600/200


Dimensions

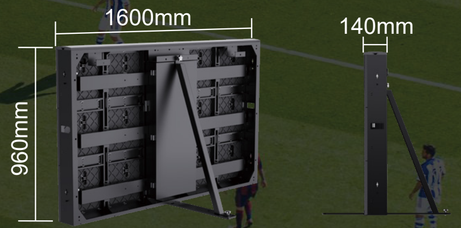

Ease Box

Super efficient for containing, transportation & warehousing



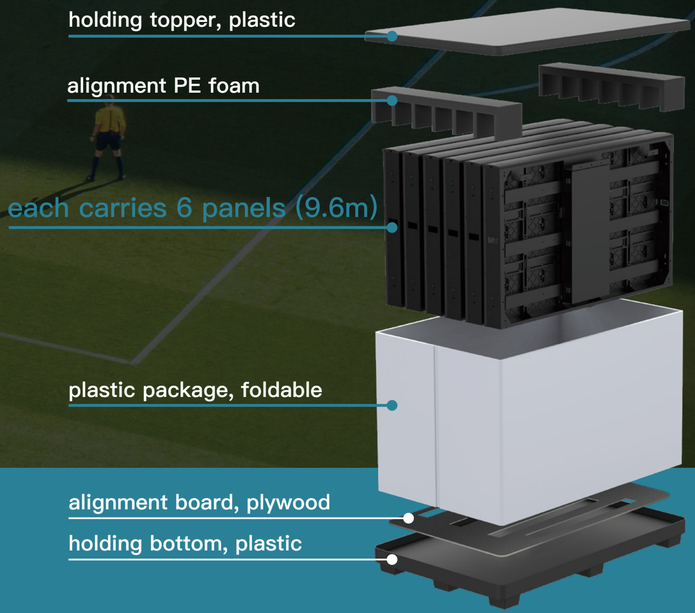

SPA


Stadium Perimeter Panel

HUAHAI LED
7231 NW 54th street, Miami, Fl 33166
(305) 436-8650
www.huahai.us


Protective, Robust & Lasting



Strong Chassis
made of high intensity sheet aluminum coated with carbon powder.




Soft Topper
lessens the impact of any knock to athletes and avoids being injured



Soft Module Mask
lessens the impact of any knock to athletes and avoids being injured



IP65 Waterproof
Rated IP65, front & back, the panel repels the harshest of wet conditions.

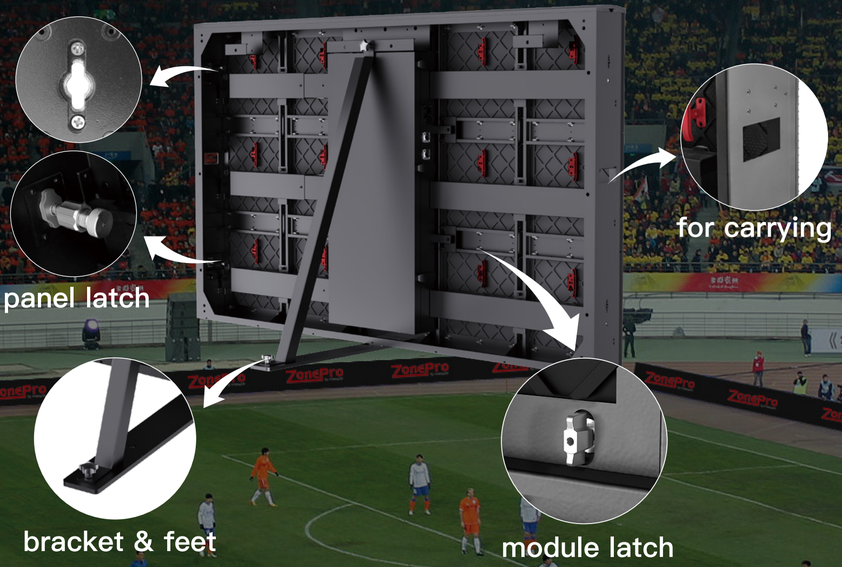

High Brightness, High Contrast


max 10,000nit

max 10,000 : 1

Big Viewing Angle



Rear Maintenance



1. 1/4 turn 6 latches



2. pull out the module

